

# MAT REFRESHER<sub>1K</sub>



## AD-9400

TECHNICAL SHEET 1/2

THE ESSENTIAL for removing superficial scratches on a matt or super matt sealed floor, oiled or treated with Hardwax matt (from Basin).

Over time, scratches appear on the floor due to various causes:

- ✓ the use of unsuitable cleaning products not from the Basin range, which have weakened the parquet (in this case matt) and reduced its durability;
- ✓ not using glides (the best ones are silicone) under chairs, furniture and tables;
- ✓ unsuitable mats at the entrance to the house, garden, etc., which results in poorly wiped shoes inside;
- ✓ unintentional accidents.

Depending on the depth of the claws, a significant or complete attenuation of the defects is achieved.

**NOTE:** Never rub a spot on the floor by hand, as this will cause a shiny spot to appear.

The product can be prepared by yourself by decanting and mixing 6 caps from a 1 litre jerry can into 5 litres of water. Therefore, it is very economical compared to a ready-to-use product.

### TECHNICAL DATA

**Base**

Aqueous phase solution

**Aspect**

In a jar: slightly transparent liquid

**Dilution**

± 20 ml per litre of water (in some cases, it is used undiluted)

**Density**

± 1 g/cm<sup>3</sup>

**Viscosity**

± 12" (DIN4, 20°C)

**Drying time**


15 to 30 minutes (for an RH between 50 and 60% and a T° of ± 20°C)

**VOC**

± 50 g/L

**Conservation**

Almost one year in its original packaging, stored in the cold at a constant temperature. Protect from frost. Close the opened packages well.

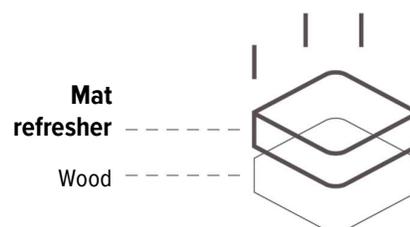

# MAT REFRESHER<sub>1K</sub>

## AD-9400



TECHNICAL SHEET 2/2

### Preparation of the floor

Parquet or wooden planks with matte finish, oil or Hardwax treatment must be vacuumed, dry, free of dirt and grease.

### Tool preparation

It is strongly recommended to use microfiber mops (80/20) and 2 buckets: one bucket with clean water and one bucket with the water/Mat refresher mixture.

### Application

1. Clean and dust the floor (e.g. vacuuming) ...
2. Mix 50 to 100 ml of AD-9400 in 5 litres of warm water.
3. Dip the mop into the bucket with AD-9400 and wring it out.
4. Wipe the floor with a wrung-out mop on light scratches.
5. Rinse the dirty mop in clean water until the mop is clean again. Repeat points 3 to 5 until the slight scratches are no longer visible.
6. Allow to dry thoroughly. Do not walk on the wet floor after maintenance with Mat refresher.

### Cleaning the microfibre mop

The microfibre mop should be regenerated after each use in a washing machine. This will ensure that you always have an efficient cleaning.

NOTE: After sealing or oiling, wait at least 14 days before wet cleaning or maintenance with Mat refresher.

With this weekly or fortnightly maintenance, you can considerably increase the life of your floor treated with the Basin range.

### BENEFITS

#### High performance

Increases the life of the floor and its beauty. Does not destroy the flooring  
Do not attack the film from the floor.

#### Pleasant smell

#### Easy to apply

#### 100% recyclable plastic packaging

#### Solvent-free

#### Renovator

Restores the matt effect to floors treated with :

NO VISIBLE HPC-5007

NO VISIBLE Shade

NO VISIBLE Oil

NO VISIBLE Oil Nuance

LAVA NO VISIBLE

PROTECT

HYDRAL MAT

Oil PU-900

Hardwax Mat

#### Disclaimer

Due to the versatility of the products, application possibilities and application processes, this information is only given with the purpose to inform. It is highly recommended to check by yourself prior to performing the final works. Our experience has taught us that every user develops his own way of working. This information was provided, oral or written, on the explicit demand of the client. This information is given in good faith and based on the current experience of Basin ChemEco. There cannot be inferred by any means any responsibility on behalf of Basin ChemEco. Prices can change - the technical files can be modified by Basin ChemEco at any time without preceding inform - Basin ChemEco is not responsible for results caused by incorrect use of the product & instructions such as e.g. quantities, timing, choice of material, temperature, subsoil, influence of light etc. No guarantee whatsoever is given for a renovation. It is up to our customer to check if the technical datasheet is up-to-date and has not been modified between the time of purchase and the use of the product.

It is up to our customers to check that this technical data sheet has not been modified and replaced between the time of purchase and the time of use of the product.

**Basin ChemEco**  
**Gravestraat 7A**  
**B-8750 WINGENE**  
**T : +32 51 65 00 10**  
**F : +32 51 65 81 05**  
**info@basin.be**

